

HomeRun **Lite-Ball Batting Cage**



Assembly Instructions

IMPORTANT

DO NOT RETURN THIS BATTING CAGE TO THE RETAIL STORE WHERE PURCHASED.

CALL TOLL FREE: (800) 492-9334

IMPORTANT WARRANTY WARNING:

USE ONLY LITE-BALLS & LITE-BALL PITCHING MACHINES WITH THIS CAGE (REAL BASEBALLS & REAL BALL MACHINES MAY CAUSE SERIOUS INJURY!) USE THIS PRODUCT WITH ADULT SUPERVISION ONLY.

SERIOUS BODILY INJURY MAY OCCUR! • READ WARNING LABELS CAREFULLY.

DO NOT LEAVE THE HOMERUN CAGE ASSEMBLED DURING HEAVY SNOW, SLEET, OR ICE STORMS. THE HOMERUN IS NOT DESIGNED TO WITHSTAND EXTREME WEATHER CONDITIONS AND DAMAGE TO THE FIBERGLASS FRAMES CAUSED BY EXTREME WEATHER MAY NOT BE COVERED IN THE MANUFACTURERS WARRANTY.

WARNING:

USE THIS PRODUCT WITH ADULT SUPERVISION ONLY. SERIOUS BODILY INJURY MAY OCCUR!
READ WARNING LABELS CAREFULLY.



For additional products and accessories visit: www.HeaterSports.com


95 West 650 South • St. George, Utah 84770 • PH: 800-492-9334 • PH: 435-656-1756 • Fax: 435-688-0741

PARTS LIST


Model# HRBC99

9 Piece Fiberglass Frame

(Quantity - 2 Sets)

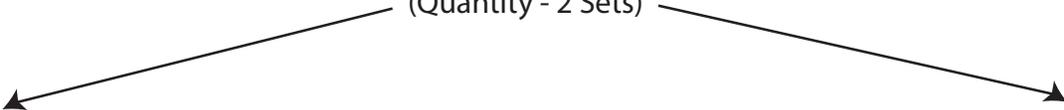


Part B (4 pieces)
Part C (4 pieces)
Part D (1 piece)

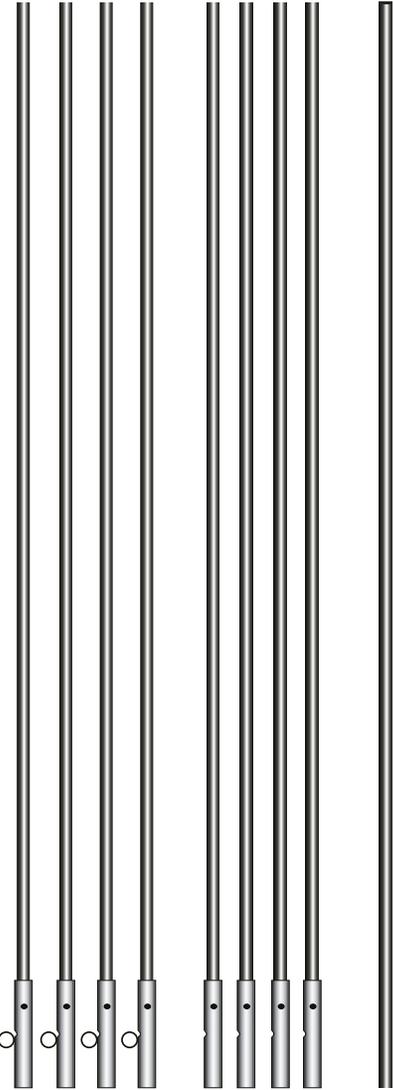

Rope Stakes & Support Ropes (White)

(Quantity - 4)


Part E

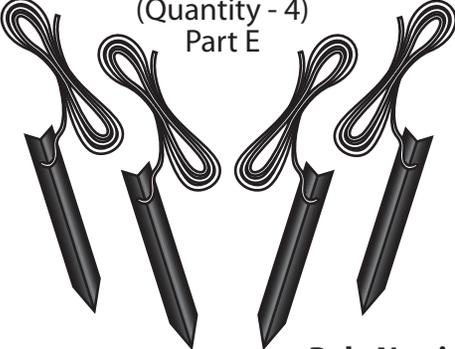


Black Guide Ropes

(Quantity - 4)

Part F

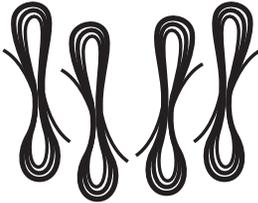


Part B (4 pieces)
Part C (4 pieces)
Part D (1 piece)

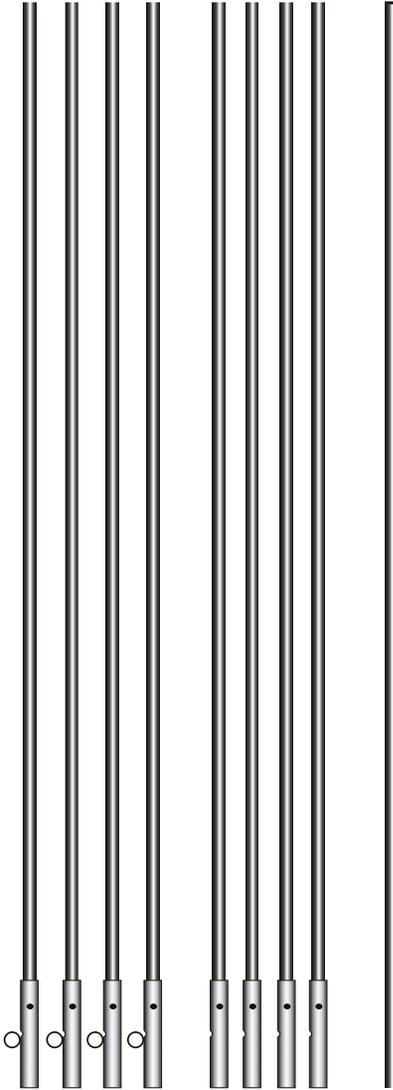

Poly Netting with Pitching Machine Opening

Part G

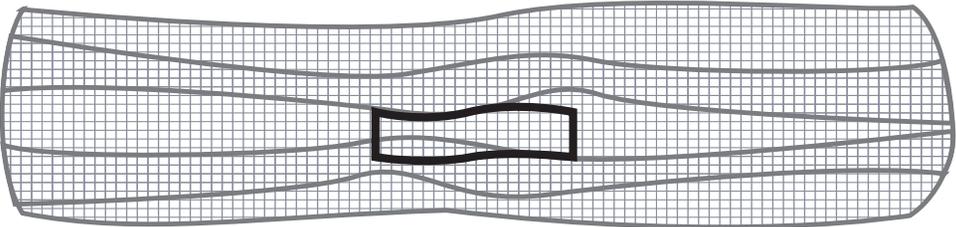


4 - Ground Stakes

Part I



Roll Of Black Tape

Part J

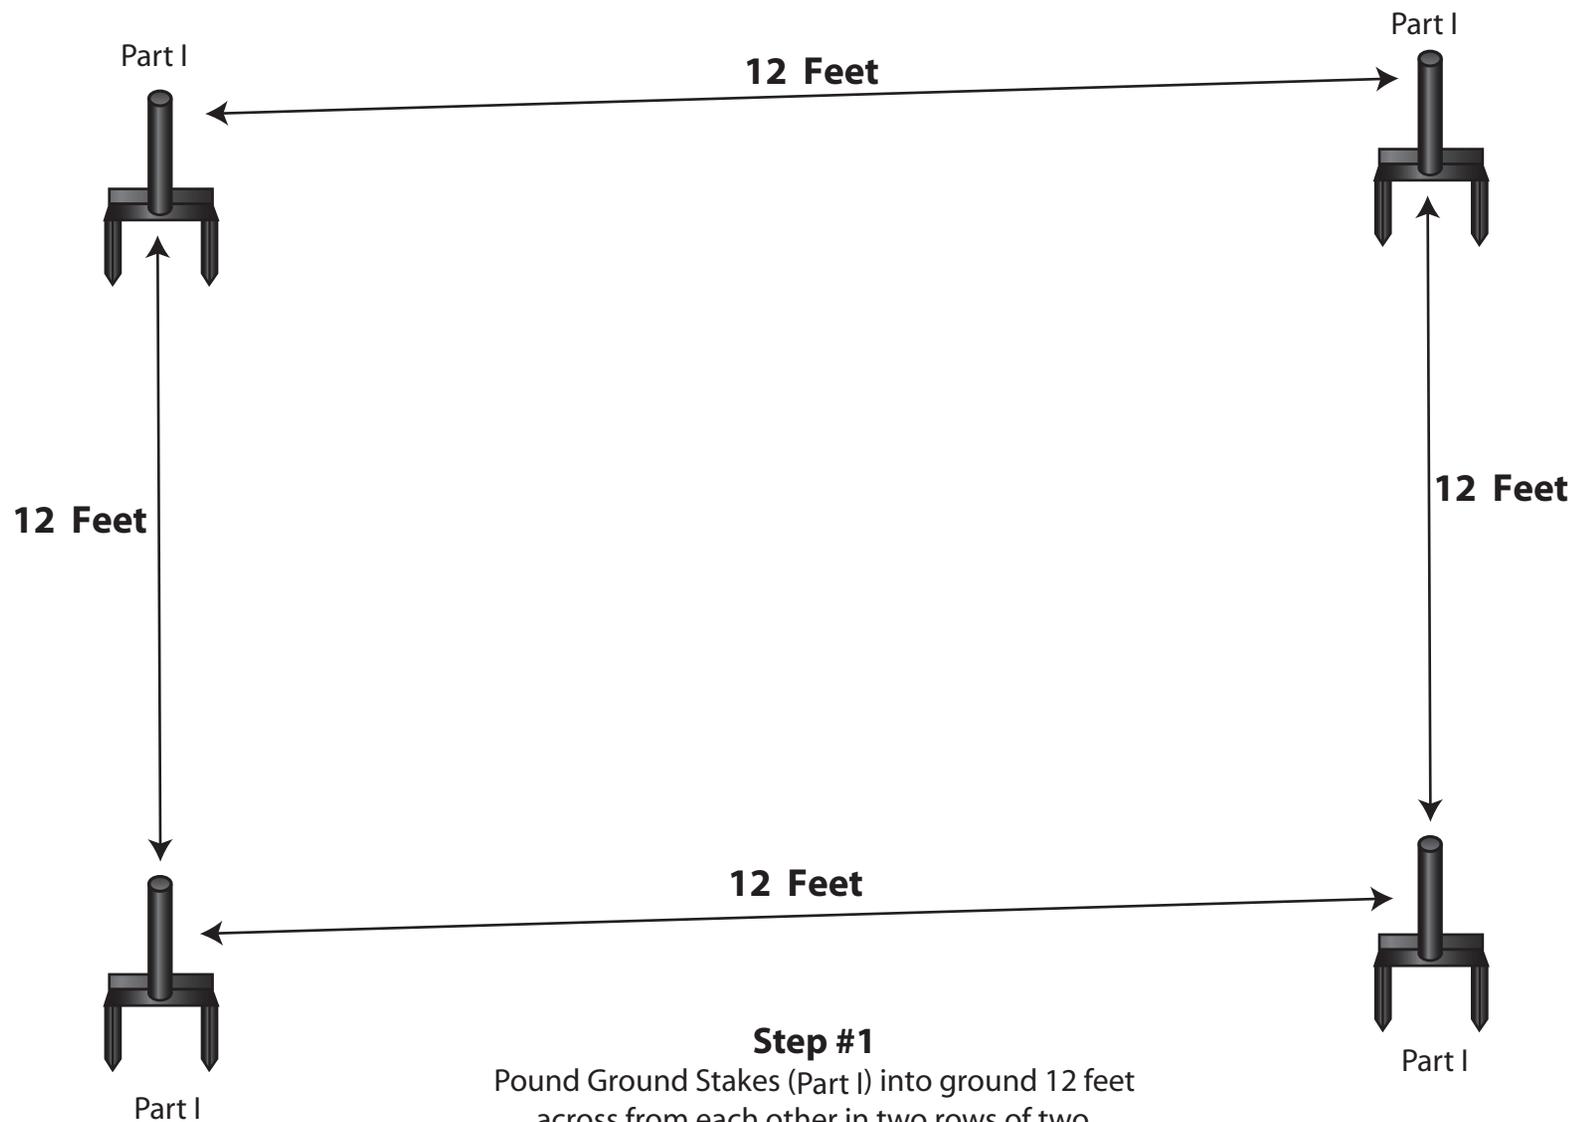


Step #1
Pound Ground Stakes (Part I) into ground 12 feet
across from each other in two rows of two.
Each row needs to be 12 feet apart.
(See diagram)

Note:
Make Sure Stakes Are Perfectly Straight Up And Down.
(Caution: Do not pound on the stake top. Damage could prevent
frame from inserting properly)

STEP 2


Assemble both Fiberglass Frames by inserting each pole end into the adjoining metal joint as indicated below.

(Note: Make sure the guide rope rings are positioned on the same side of the pole assembly)

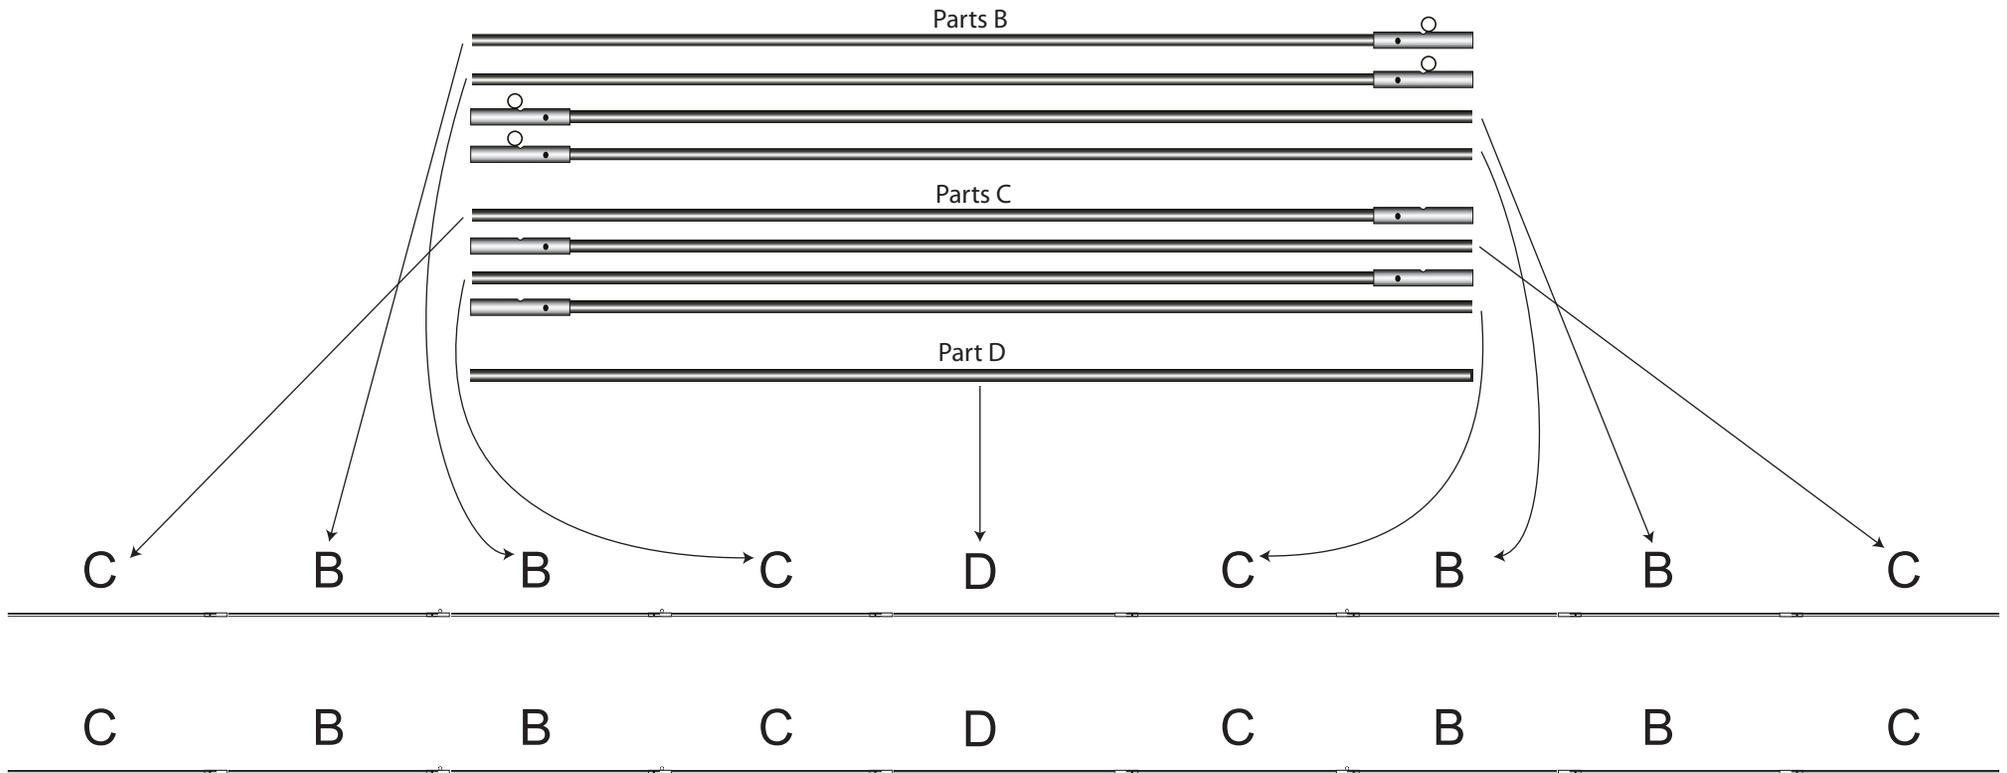

STEP 3


Tape Pole Joints

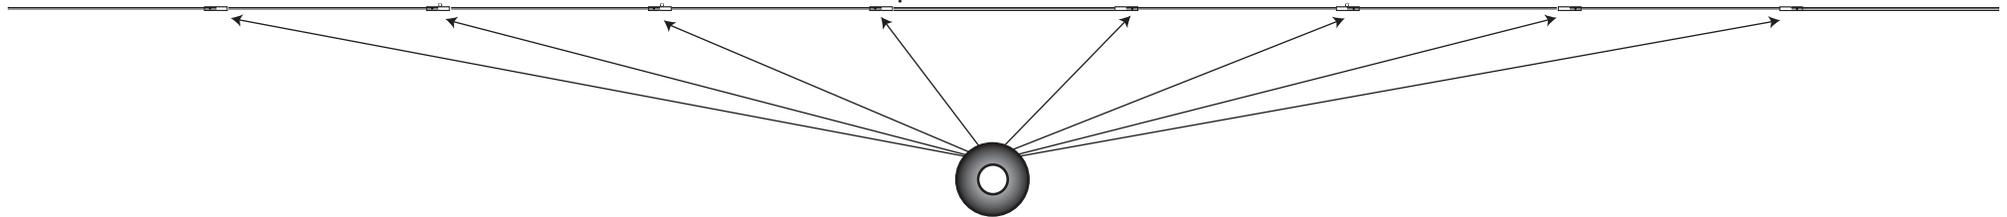

Step #4


Insert each of the fiberglass pole ends into the ground stakes by arching the poles to form the cage.

Note: When forming the poles into an arch, make sure to face the rope rings on the joint fittings inward so that the netting slides over the frames easily.

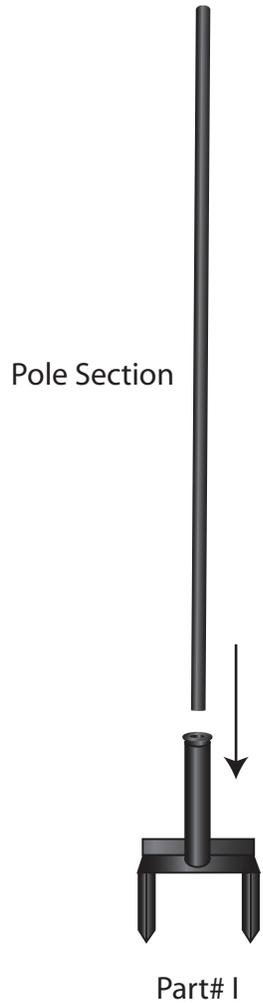

Step #5

Take the Black Guide Ropes (Part F), and attach the ropes to the rope rings as indicated in the illustration below.

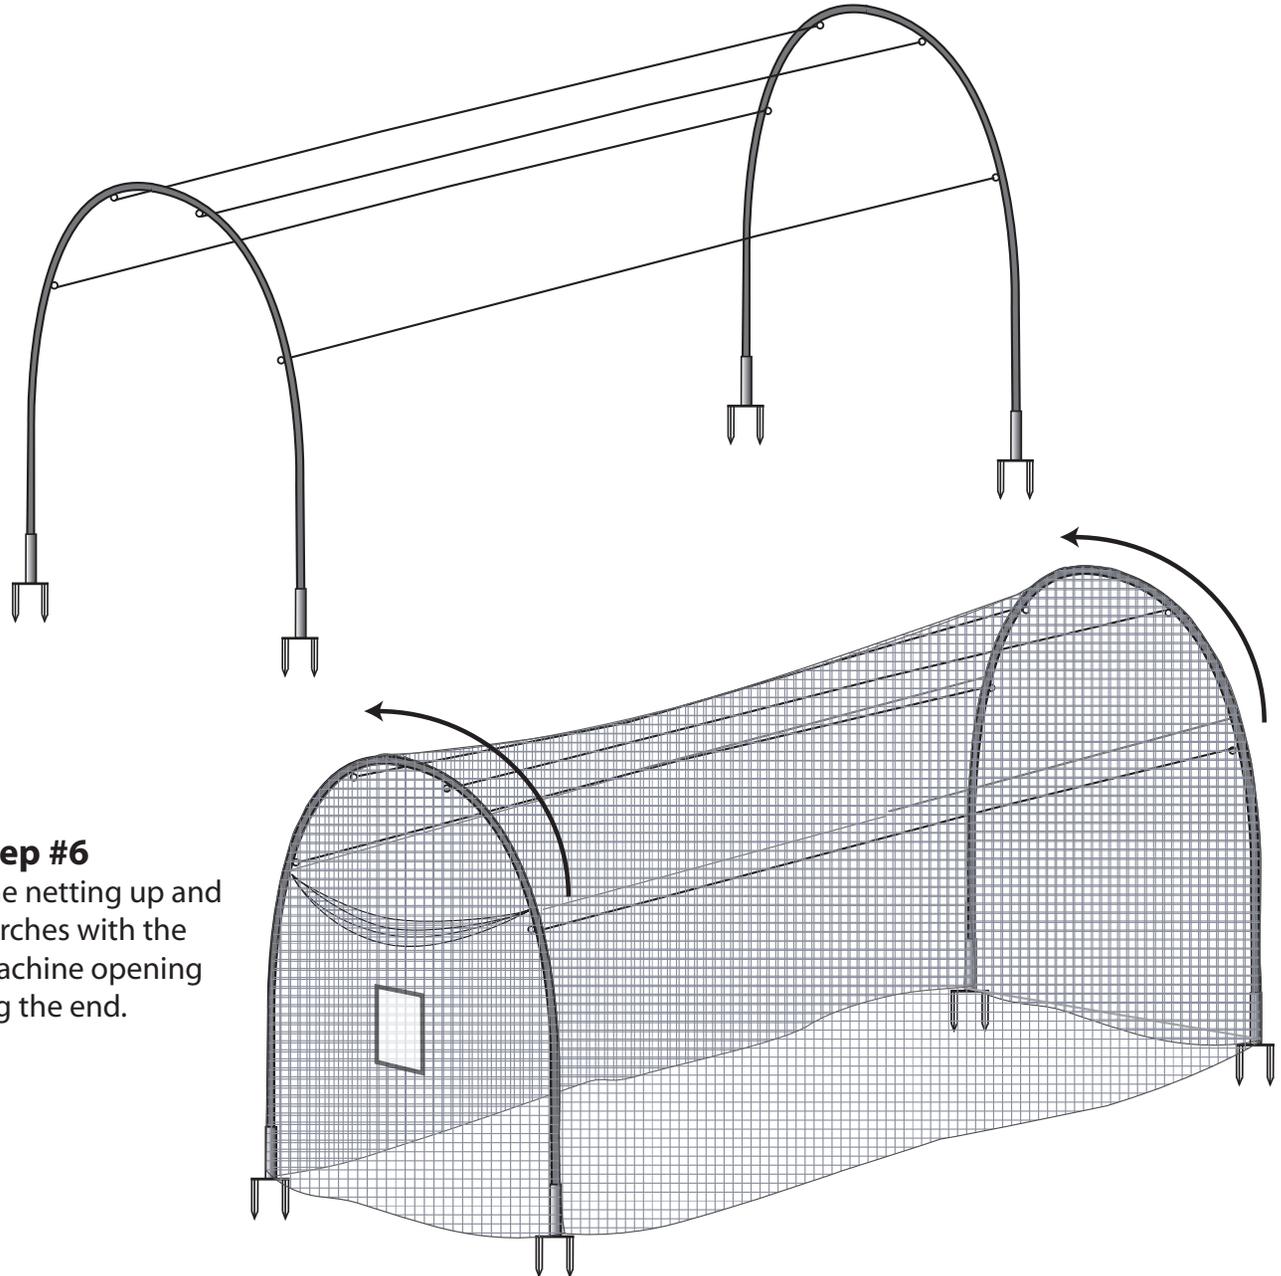


Step #6

Next, slide the netting up and over the arches with the pitching machine opening facing the end.

Step #7

To adjust the height of the Pitching Machine Opening, gather the Netting where the Support Rope ties to the rope ring on the pole frame. After determining the desired height, pass the support rope through the netting holes and tie the support rope to the rope rings on the fiberglass pole arch. Do this for both sides of the Opening.

Gather Netting here to adjust the opening height.

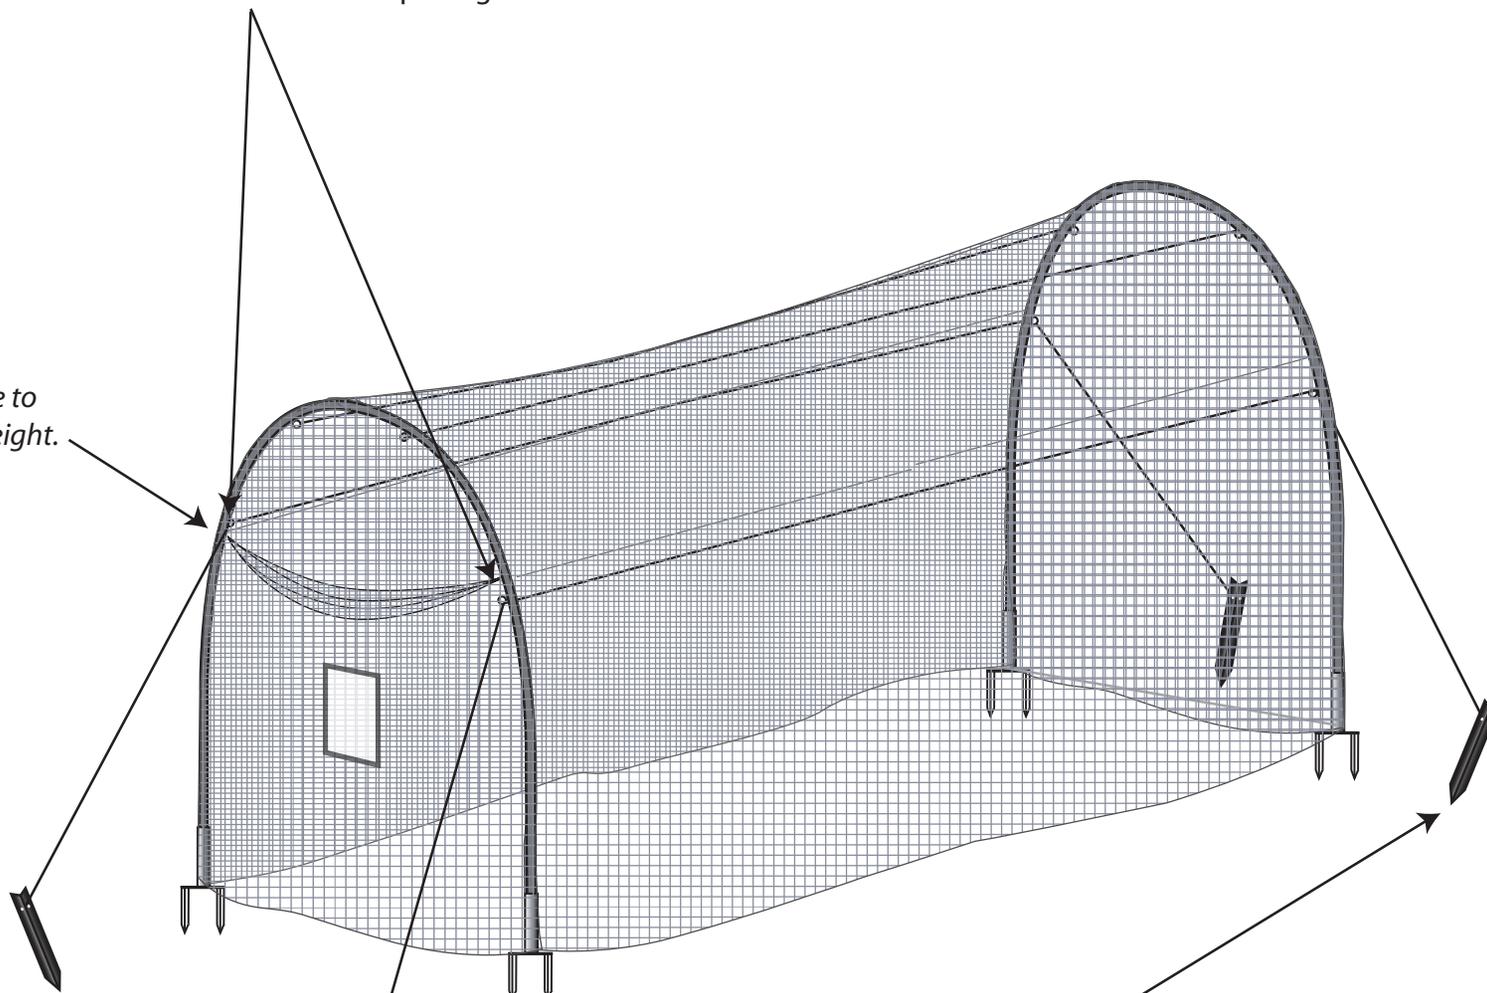

Note: The Pitching Machine may be placed at shorter or longer distances from the opening to get the desired ball speed.

Step #8

Tie the White Support Ropes to the guide rope rings as indicated in the above illustration. Pull the Support Ropes tight, and drive the Ground Stakes into the ground.